



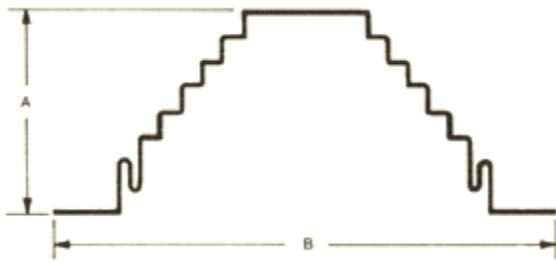

DECK-MATES FOR ALL EXPOSED METAL ROOF SYSTEMS

The RPS Deck-Mate Pipe Seal is designed to work in conjunction with any configuration of corrugated roof. The Deck-Mate is engineered so that the aluminum flanged base bends to any contour, deck irregularity, or roof pitch. The Deck-Mate seals watertight to the roof panel with silicone sealant and standard self-drilling, self-tapping fasteners.

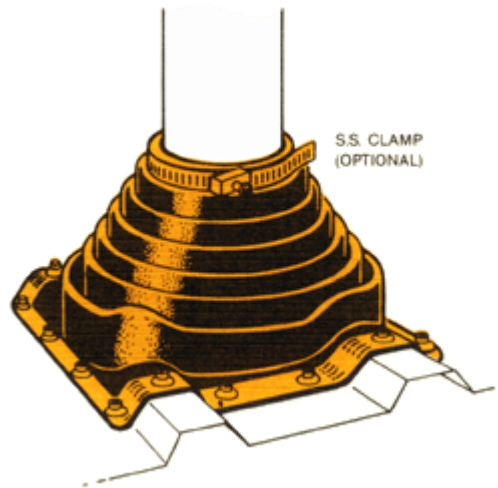

DECK-MATE SIZING CHART

MODEL	SIZE (O.D. of pipe)	A	B
D.M. 0	.125" - .75"	.75"	2.25"
D.M. 1	.25" - 2"	3"	4.5"
D.M. 2	1.25" - 3"	4"	6"
D.M. 3	.25" - 4"	4"	8"
D.M. 4	3" - 6"	5"	10"
D.M. 5	4" - 7"	5"	11"
D.M. 6	5" - 9"	6"	12"
D.M. 7	6" - 11"	6"	14"
D.M. 8	7" - 13"	6"	17"
D.M. 9	10" - 18"	8"	25"
D.M. 10	13" - 26"	8"	34"

SPECIFICATION

Furnish and install RPS Deck-Mate as manufactured by Roof Products & Systems Corporation at all locations where pipes 18" or less penetrate the metal roof system as shown on drawings.

The Deck-Mate shall be EPDM or Silicone molded rubber. EPDM Deck-Mates shall have a serviceable temperature range of -60°F to +270°F. Silicone Deck-Mates shall have a serviceable temperature range of -100°F to +500°F. EPDM and silicone shall be resistant to ozone and ultraviolet. Each unit shall have a 1" wide flexible corrosion-resistant flexible aluminum base.

[PIPE PORTAL SYSTEM](#) [MULTIPLE PIPE PORTAL SYSTEM](#) [ALUMI-FLASH](#)

ROOF PRODUCTS & SYSTEMS • 815 KIMBERLY DRIVE • CAROL STREAM, IL 60188 • TEL: (800) 624-8642 • FAX: (866) 466-9335

All information is subject to change without notice. Dimensions and specifications shown are within manufacturing tolerances.
© Copyright Commercial Products Group of Hart & Cooley, Inc., November 2007. All Rights Reserved.