





Model "VR" Isolation Base

Technical Product Information

OPTIONAL FEATURES

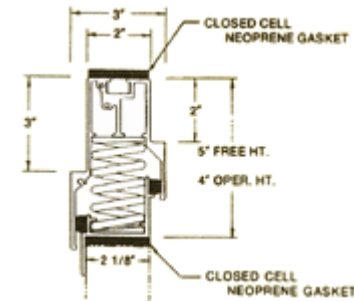


The standard RPS "VR" base can be furnished with a continuous closed cell neoprene gasket on either the top, bottom, or both surfaces.





One or two inch extruded aluminum extensions are furnished when the equipment's base rail exceeds three inches.

Customized treated wood adapters are furnished as part of the "VR" base to accommodate equipment manufacturer's unique base rail configurations.

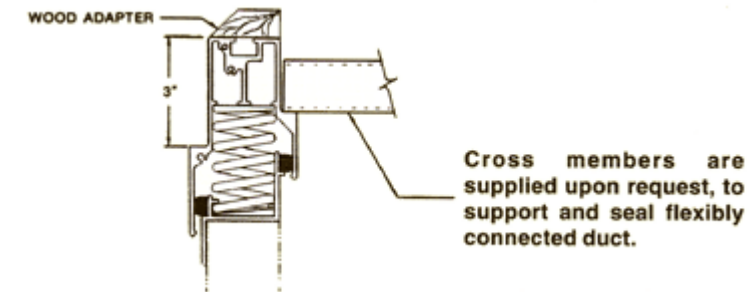

ISOLATION FOR EQUIPMENT RAIL MOUNTING

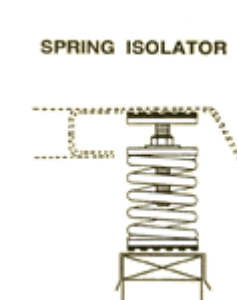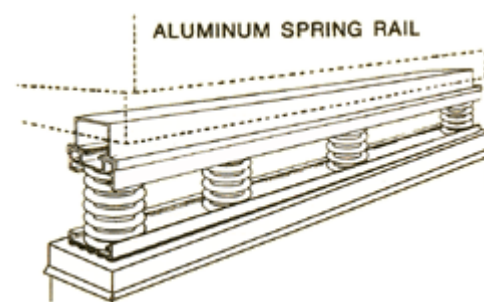

If the condenser section is supported by a separate RPS Equipment Rail beyond the standard curb, a separate aluminum spring rail or two spring isolators are provided to support the overhang section.

[VR BASE SPECIFICATIONS](#)

[VR BASE INSTALLATION INSTRUCTIONS](#)