MILCOR
SINCE 1902

Floor & Sidewalk Doors

Technical Product Information

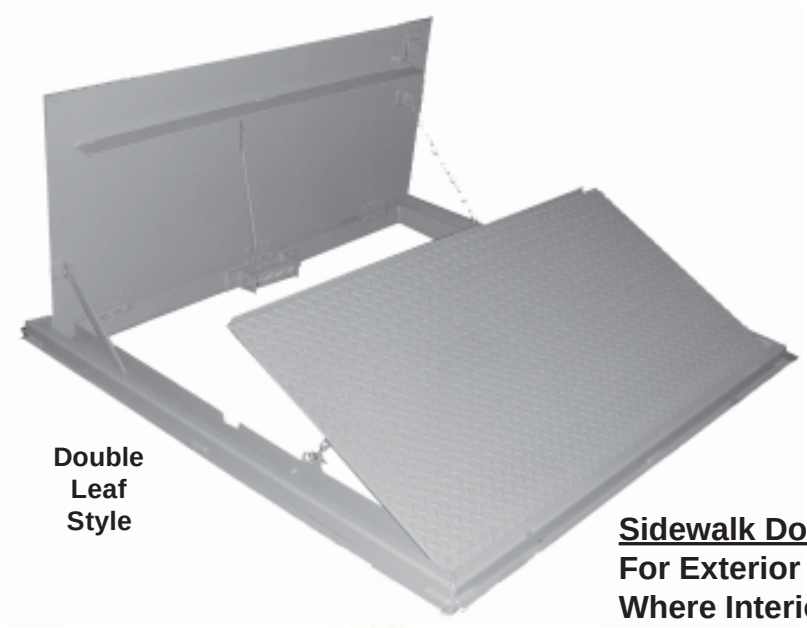

Double Leaf Style

Milcor Floor & Sidewalk Doors Are Built To Be Dependable and Long-Lasting

Sidewalk Doors

For Exterior Access Applications or Where Interior Moisture Conditions Require Drainage Provisions.

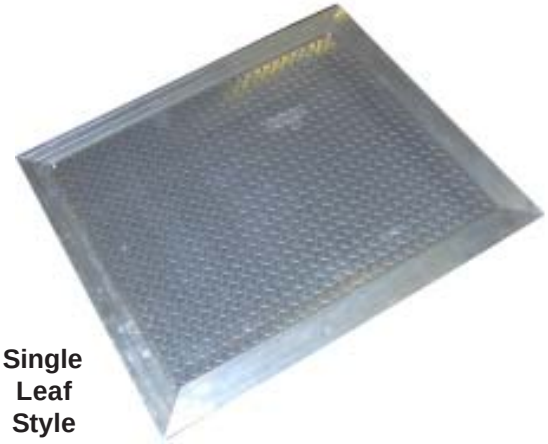

Single Leaf Style

Floor Doors

For Interior Access To Valves, Electrical or Computer Wiring, or For Access To Upper or Lower Floor Levels.

Overall Product Features

Heavy-Duty Construction to Meet Required Loads

Solid framing and anchoring designs and options in both aluminum or steel construction can handle demanding applications for foot or vehicle traffic safely.

Stainless Steel Hardware

For installation in highly corrosive environments, roof hatches are available with stainless steel hardware.

Locking and Latching Doors

Where addtional security is needed, floor and sidewalk doors are available with mortise cylinder locks and recessed padlock hasps. Contact the factory for other lock and latching options.

Special Wheel Loading

GA and GD style sidewalk doors are available with H-10 and H-20 wheel loading. They are designed for off-street use where not subjected to high volume traffic.

MILCOR • 815 KIMBERLY DRIVE • CAROL STREAM, IL 60188 • TEL: (800) 624-8642 • FAX: (866) 466-9335

© Copyright, January 2008, Commercial Products Group of Hart & Cooley, Inc. All Rights Reserved.

All information is subject to change without notice. Dimensions and specifications shown are within manufacturing tolerances.

Non-Security: Aluminum Floor Doors

• Low Cost Floor Access

Milcor's F, T and Z Series Non-Security Type Aluminum Floor Doors provide low cost access where access to equipment or services located under floors is required.

• Easy Accessibility

Equipped with lift ring access for environments where an unlocked design is acceptable.

• Powerful Load Capacity.

Designed to support a uniformly distributed load of 200 psf on a 40" span to 1,000 psf on a 2'0" span.

• Low Maintenance

Milcor Aluminum Floor Doors provide low maintenance of all-aluminum welded.

• Styles

Milcor Aluminum Floor Doors provide low maintenance of all-aluminum welded construction.

Flush Door Style (F Series)

1/4" Aluminum Plate (Smooth or Safety Tread)

Tile Detail (T Series)

1/4" Aluminum Smooth Plate (Recessed Cover)

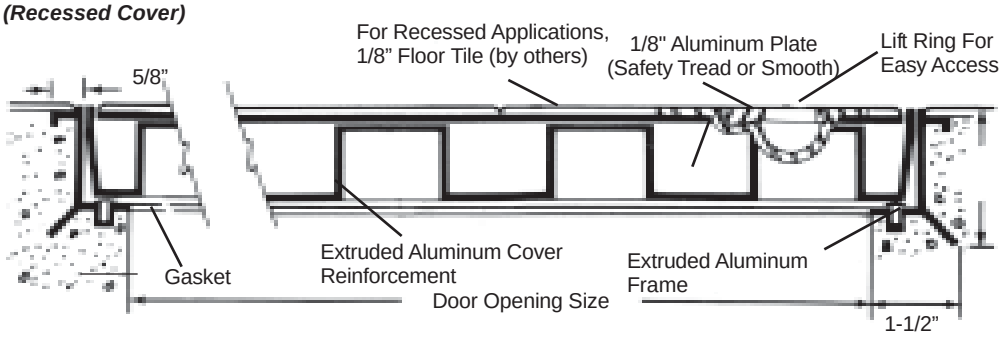

Terrazzo Detail (Z Series)

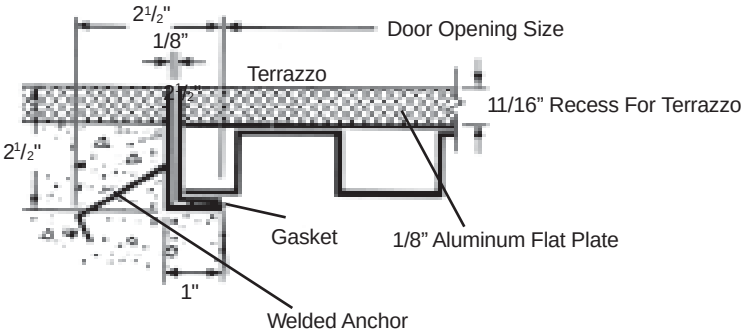

Door Opening Size is the Same as Hole Size.

Additional Keying-In Required for Mounting Door Frame

Standard Sizes and Model Number

(Second dimension is for length on hinge side.)

Dimensions	Flush Cover Model No.	Flush Cover Lbs.	Tile Cover Model No.	Tile Cover Lbs.	Terrazzo Cover Model No.	Terrazzo Cover Lbs.
2'0" x 2'0"	F-62	30	T-62	30	Z-62	40
2'6" x 2'6"	F-64	35	T-64	35	Z-64	45
3'0" x 2'6"	F-66	40	T-66	40	Z-66	50
3'0" x 3'0"	F-68	45	T-68	45	Z-68	55

MILCOR • 815 KIMBERLY DRIVE • CAROL STREAM, IL 60188 • TEL: (800) 624-8642 • FAX: (866) 466-9335

© Copyright, January 2008, Commercial Products Group of Hart & Cooley, Inc. All Rights Reserved.

All information is subject to change without notice. Dimensions and specifications shown are within manufacturing tolerances.