



# ***Alumi-Flash Systems***

*Technical Product Information*

**New construction flashings for all roof types**

**Standard  
Alumi-Flash**



**Extra Wide  
Alumi-Flash**




**Extra Tall  
Alumi-Flash**




**Large  
Alumi-Flash**

The Portals Plus Alumi-Flash is compatible with all types of roof systems and makes pitch pans obsolete. Due to the flexibility of the EPDM rubber caps, roof leaks are eliminated because penetrations are allowed to expand, contract, and vibrate independently of the waterproofing. There are five (5) caps available which accommodate a variety of pipes, tubes, and angle irons from .375" through 12". The caps are molded EPDM (Ethylene Propylene Diene Monomer) rubber which is compounded to resist degradation due to oxidation or exposure to ozone and ultraviolet rays, while having a serviceable temperature range of -60F to +270F. The caps are mechanically sealed to the Alumi-Flash base with a double "Weather-Tite Pressure Seal", which consists of two (2) beads formed into the collar that mate with the double grooves on the inside of the caps. The base must be roofed in, using good roofing practices. Together, the cap and base provide a permanent, watertight and maintenance free means for penetrating roofs that is simple and easy to install.

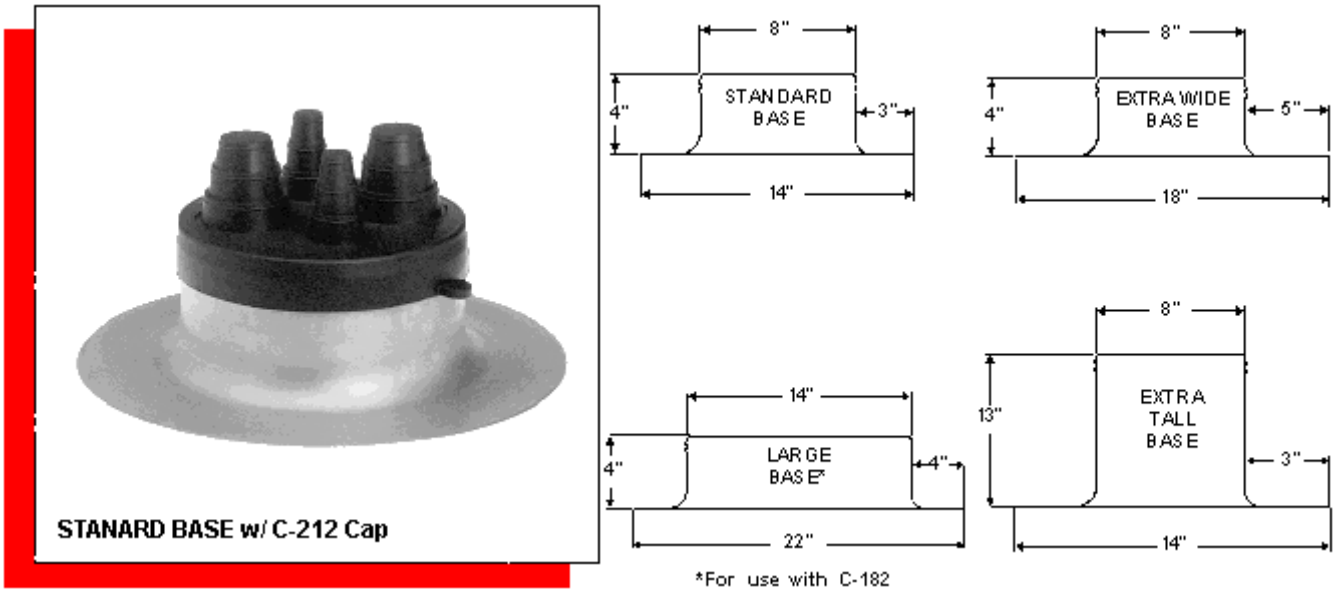

**SELECT A CAP FOR EACH BASE REQUIRED**

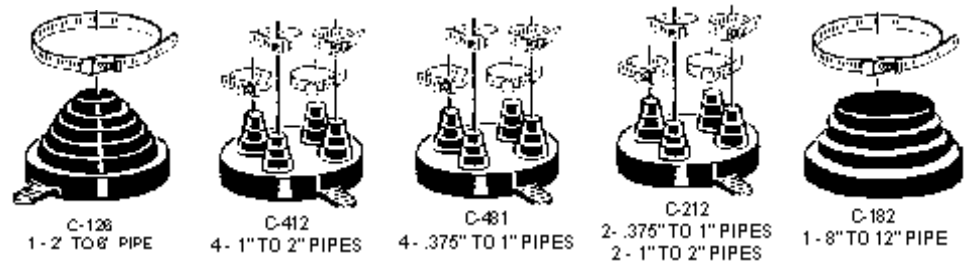

Call Customer Service For Price

<b>ALUMI-FLASH Standard</b>			
NEW UPC PART NUMBER	DESCRIPTION	QTY/ CTN	LIST PRICE PER UNIT
<a href="#">22015</a>	w/ 126 BLACK CAP (1 - 2" to 6" pipe)	5	
<a href="#">22025</a>	w/ 212 BLACK CAP (2 - .375" to 1 & 2 - 1" - 2" pipes)		
<a href="#">22035</a>	w/ 412 BLACK CAP (4 - 1" to 2" pipes)		
<a href="#">22045</a>	w/ 481 BLACK CAP (4 - .375" to 1" pipes)		
<a href="#">22051</a>	w/ 182 BLACK CAP (1 - 8" to 12" pipe)	1	
<a href="#">22065</a>	w/ 126 WHITE CAP (1 - 2" to 6" pipe)	5	
<a href="#">22075</a>	w/ 212 WHITE CAP (2 - .375" to 1 & 2 - 1" - 2" pipes)		

<b>ALUMI-FLASH EW</b>			
NEW UPC PART NUMBER	DESCRIPTION	QTY/ CTN	LIST PRICE PER UNIT
<a href="#">23015</a>	w/ 126 BLACK CAP (1 - 2" to 6" pipe)	5	
<a href="#">23025</a>	w/ 212 BLACK CAP (2 - .375" to 1 & 2 - 1" - 2" pipes)		
<a href="#">23035</a>	w/ 412 BLACK CAP (4 - 1" to 2" pipes)		
<a href="#">23045</a>	w/ 481 BLACK CAP (4 - .375" to 1" pipes)		
<a href="#">23055</a>	w/ 126 WHITE CAP (1 - 2" to 6" pipe)	5	
<a href="#">23065</a>	w/ 212 WHITE CAP (2 - .375" to 1 & 2 - 1" - 2" pipes)		

<b>ALUMI-FLASH XT</b>			
NEW UPC PART NUMBER	DESCRIPTION	QTY/ CTN	LIST PRICE PER UNIT
<a href="#">24015</a>	w/ 126 BLACK CAP (1 - 2" to 6" pipe)	4	
<a href="#">24025</a>	w/ 212 BLACK CAP (2 - .375" to 1 & 2 - 1" - 2" pipes)		
<a href="#">24035</a>	w/ 412 BLACK CAP (4 - 1" to 2" pipes)		
<a href="#">24045</a>	w/ 481 BLACK CAP (4 - .375" to 1" pipes)		
<a href="#">24055</a>	w/ 126 WHITE CAP (1 - 2" to 6" pipe)	4	
<a href="#">24065</a>	w/ 212 WHITE CAP (2 - .375" to 1 & 2 - 1" - 2" pipes)		

<b>ALUMI-FLASH EW w/ PRIMED FLANGE</b>			
NEW UPC PART NUMBER	DESCRIPTION	QTY/ CTN	LIST PRICE PER UNIT
<a href="#">22215</a>	w/ 126 BLACK CAP (1 - 2" to 6" pipe)	5	
<a href="#">22225</a>	w/ 212 BLACK CAP (2 - .375" to 1 & 2 - 1" - 2" pipes)		
<a href="#">22235</a>	w/ 412 BLACK CAP (4 - 1" to 2" pipes)		
<a href="#">22245</a>	w/ 481 BLACK CAP (4 - .375" to 1" pipes)		
<a href="#">22265</a>	w/ 126 WHITE CAP (1 - 2" to 6" pipe)	5	
<a href="#">22275</a>	w/ 212 WHITE CAP (2 - .375" to 1 & 2 - 1" - 2" pipes)		

[Adapter Rings](#) can modify these penetrations  
[Snaplock Clamps](#).  
[Installation Instructions](#).  
[CAD Page](#)

Other Flashing Systems: [Pipe Portals](#)  
[Double Pipe Portals](#)  
[Plasti-Flash](#)  
[Pipe Flashings \(boots\)](#)

**PORTALS PLUS** 815 Kimberly Drive, Carol Stream, IL 60188

TEL: (800) 624-8642 FAX: (866) 466-9335

All information is subject to change without notice. Dimensions and specifications shown are within manufacturing tolerances.  
 © Copyright Commercial Products Group of Hart & Cooley, Inc., January, 2009. All Rights Reserved.