



# ***Retrofit Flashing Systems***

*Technical Product Information*

For existing penetrations that can not be disconnected




**Small  
Retrofit  
Flashing**

**Large  
Retrofit  
Flashing**



The Retrofit Flashing offers a quick and easy installation, eliminating roof leaks at pipes and other roof penetrations without disconnecting the penetration. However, the Retrofit still allows for movement between the penetration and roof, while maintaining a perfect seal. The perfect seal is achieved with an integral tongue and groove closure, plus an overlapping flap, and is mechanically fastened with stainless steel hardware, which is included. Retrofit Flashings are available in EPDM for single-ply roofing and Neoprene for built-up asphalt, coal tar pitch, modified bitumen, and cold process systems. Both materials have excellent resistance to ozone and ultraviolet degradation and a serviceable temperature range of -60 F to +270 F. There are two Retrofits available: Small, for pipes up to 3" and Large, for pipes 3.5 " through 6". The Retrofit Flashings also have the added benefit of a variety of adapter rings allowing for even greater versatility. By using the Retrofit Adapter Rings, projections with unusual shapes can be flashed in a positive and secure manner.

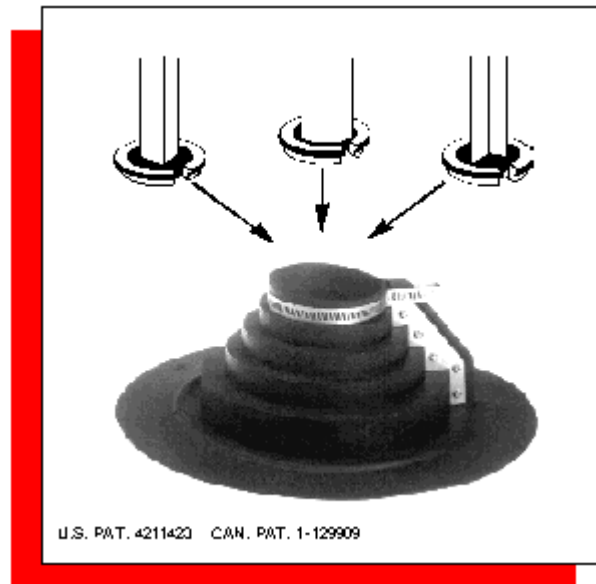

**Available adapters to fit  
most Retrofit Flashings**  
(See adapter ring section for  
proper sizing)





**Round Adapters**  
.5" to 3.5"  
(.25" Increments)



**Angle Iron**  
1", 1.75", 3", and 4"



**Square Tube**  
3" and 4"

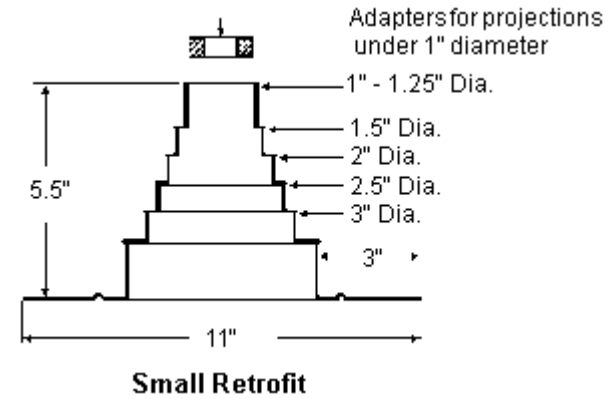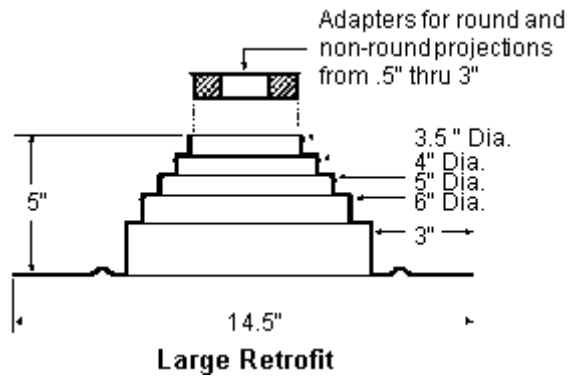

Call Customer Service For Price

NEW UPC PART NUMBER	OLD PART PART NUMBER	DESCRIPTION	QTY/CTN	LIST PRICE PER UNIT
<a href="#">11015</a>	R001	SMALL RETROFIT FLASHING - BLACK EPDM	5	
<a href="#">11025</a>	R002	LARGE RETROFIT FLASHING - BLACK EPDM	5	
<a href="#">12015</a>	R004	SMALL RETROFIT FLASHING - NEOPRENE	5	
<a href="#">12025</a>	R005	LARGE RETROFIT FLASHING - NEOPRENE	5	

[Installation Instructions.](#)

[Snaplock Clamps.](#)

[CAD Page.](#)

**PORTALS PLUS** 815 Kimberly Drive, Carol Stream, IL 60188

TEL: (800) 624-8642 FAX: (866) 466-9335

All information is subject to change without notice. Dimensions and specifications shown are within manufacturing tolerances.  
© Copyright Commercial Products Group of Hart & Cooley, Inc., January, 2009. All Rights Reserved.