



Shingle Flashing Systems




Technical Product Information

Flashings for all types of shingle roofs



Shingle Flashing
galvanized

Portals Plus Shingle Flashings are designed to effectively seal round pipe penetrations, from 1.25" through 4", penetrating shingle roofing systems at up to 40° slopes. The seal is an elastomeric collar integrally locked into a rigid base which remains flat on the roof. Bases are available in 24 gauge galvanized steel, .032 mill finish aluminum, and black thermoplastic. Installation is easy- the Shingle Flashing slips over the pipe and automatically seals to the pipe at the correct roof angle. Pipes can be all types, including copper, cast iron, plastic, aluminum, and galvanized. Shingle Flashings are rated to 180°F continuous heat. Also available is an all elastomeric one piece Shingle Flashing usable to 45° slope and 200°F continuous heat. All Portals Plus Shingle Flashings are listed by UPC, SBC, AND BOCA- the three major national codes. Shingle Flashings are available to fit the following nominal pipe sizes: 1.25" - 1.5", 2", 3", & 4".

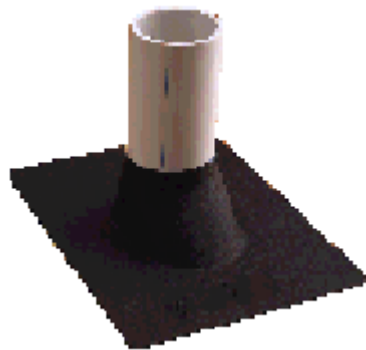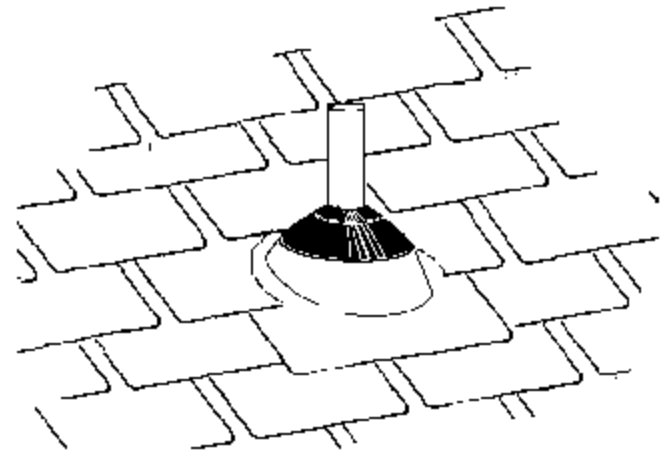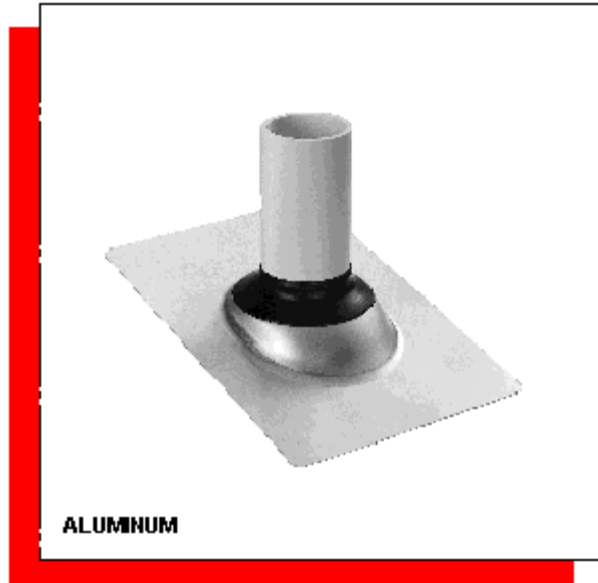

Elastomeric



Galvanized



Thermoplastic

GALVANIZED

NEW UPC	SIZE	DESCRIPTION	LIST PRICE
---------	------	-------------	------------

Call Customer Service For Price

PART NUMBER			PER UNIT
85009	1.25" - 1.50"	GALVANIZED FLASHING BASE w/ elastomeric collar	
85019	2"	GALVANIZED FLASHING BASE w/ elastomeric collar	
85029	3"	GALVANIZED FLASHING BASE w/ elastomeric collar	
85039	4"	GALVANIZED FLASHING BASE w/ elastomeric collar	

ELASTOMERIC			
NEW UPC PART NUMBER	SIZE	DESCRIPTION	LIST PRICE PER UNIT
85109	1.25" - 1.50"	ELASTOMERIC FLASHING BASE w/ elastomeric collar	
85119	2"	ELASTOMERIC FLASHING BASE w/ elastomeric collar	
85129	3"	ELASTOMERIC FLASHING BASE w/ elastomeric collar	
85139	4"	ELASTOMERIC FLASHING BASE w/ elastomeric collar	

ALUMINUM			
NEW UPC PART NUMBER	SIZE	DESCRIPTION	LIST PRICE PER UNIT
85209	1.25" - 1.50"	ALUMINUM FLASHING BASE w/ elastomeric collar	
85219	2"	ALUMINUM FLASHING BASE w/ elastomeric collar	
85229	3"	ALUMINUM FLASHING BASE w/ elastomeric collar	
85239	4"	ALUMINUM FLASHING BASE w/ elastomeric collar	

THERMOPLASTIC			
NEW UPC PART NUMBER	SIZE	DESCRIPTION	LIST PRICE PER UNIT
85309	1.25" - 1.50"	THERMOPLASTIC FLASHING BASE w/ elastomeric collar	
85319	2"	THERMOPLASTIC FLASHING BASE w/ elastomeric collar	
85329	3"	THERMOPLASTIC FLASHING BASE w/ elastomeric collar	
85339	4"	THERMOPLASTIC FLASHING BASE w/ elastomeric collar	

[Installation Instructions](#)
[CAD Page](#)

PORTALS PLUS 815 Kimberly Drive, Carol Stream, IL 60188

TEL: (800) 624-8642 FAX: (866) 466-9335

All information is subject to change without notice. Dimensions and specifications shown are within manufacturing tolerances.
 © Copyright Commercial Products Group of Hart & Cooley, Inc., January, 2009. All Rights Reserved.